

# FULL-HEIGHT TURNSTILE SESAME TWIN - L Y type rotor

Sesame Twin - L is also called double turnstile. This pedestrian security gate benefits with significant space and cost saving in comparison to two single turnstiles installed one near another. It is a perfect fit for applications with highest intensity of pedestrian traffic, like stadiums or large factories. Can be supplied both in fully welded or assembly (attractive for transportation) desing.



## MODEL OF THE FULL-HEIGHT TURNSTILE SERIES GUARANTEES FULL PROTECTION OF THE TERRITORY



### Advantages

- Motorized
- Bi-directional
- Variety of metal and metal treatment types
- Three arms (angle between bars 120°) and four arms (angle between bars 90°) modifications
- Integration with any type of access control and ID systems
- Low power consumption
- Whisper quiet, low noise operation
- Possibility of customization
- Wide range of accessories
- Complete supply set as a standard
- Fail-safe (automatic opening in both direction when power goes off)

### Standard

- Wired remote control panel
- 2 types of LED indication
- Fail-safe

### Options

- Integration with passes counter/RFID device/coin acceptor push button/fingerprint/barcode/QR-code reader etc.)
  - Remote radio controller
  - Heating function for external installation (for cold climates)
- Backup battery 12V, 17 A-h
- Protective canopy or roof

\* first figure is for indoor installation, second figure is for outdoor installation.  
Protection level could be up to IP65 upon request.



CartPoland Maciej Twardowski  
Wólka Mińska ul. Olszowa 5, 05 - 300 Mińsk Mazowiecki  
(ang.) office@cartpoland, Tel.: +48-795-183-316 | (ros.) inka@cartpoland.pl, Tel.: +48 795 15 83 20  
www.bramkiobrotowe.com | www.bramkiobrotowe.eu | www.cartpoland.pl

### Technical Specifications:

Unit width, mm	2234
Unit length, mm	1158
Unit height, mm	2300
Weight, kg (not more)	550
Standard mechanism	Servo-drive (Motorized)

#### Controlled by:



access control system;




manual control

When power goes OFF both directions are open.

#### Electrical Specifications:

- Voltage:
  - from the AC 230V, 50/60Hz;
  - from a DC source 12 V;
- Maximum power consumption 55W per pass

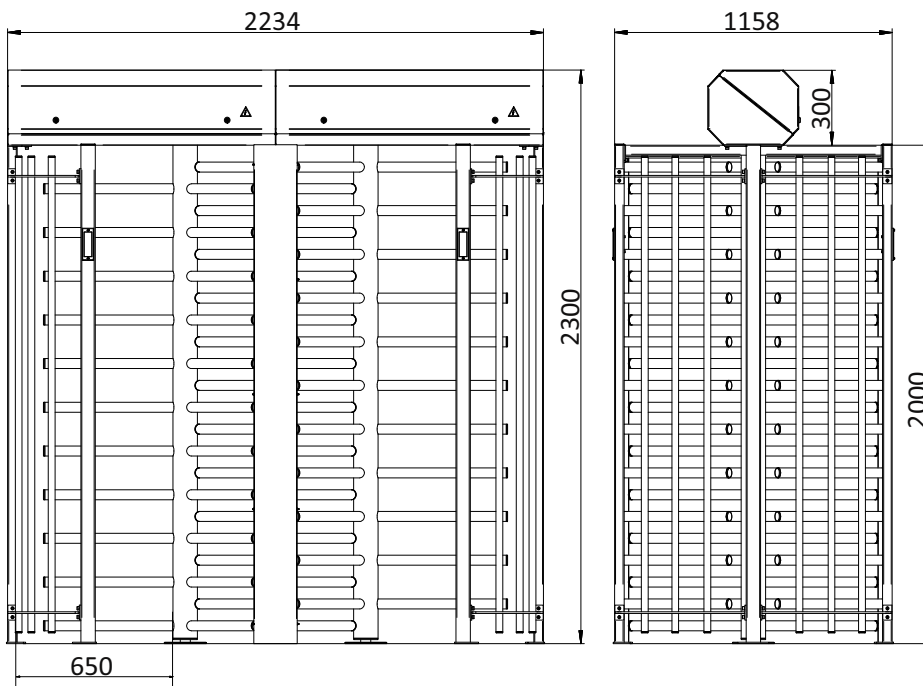

#### Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL

#### Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others



CartPoland Maciej Twardowski

Wólka Mińska ul. Olszowa 5, 05 - 300 Mińsk Mazowiecki

(ang.) office@cartpoland, Tel.: +48-795-183-316 | (ros.) inka@cartpoland.pl, Tel.: +48 795 15 83 20  
www.bramkiobrotowe.com | www.bramkiobrotowe.eu | www.cartpoland.pl

