


FULL-HEIGHT TURNSTILE SESAME –XL XL 90 type rotor

Sesame - L is a one lane type of full height turnstile gate. It ensures vandal proof security level to large variety of possible applications: stadiums, factories, parks, premises with highest security requirements etc. Strength and durability is granted by robust fully welded design. On the other hand, attractive for shipment assembly modification of automatic barrier gate is also available.



MODEL OF THE FULL-HEIGHT TURNSTILE SERIES
GUARANTEES FULL PROTECTION OF THE TERRITORY

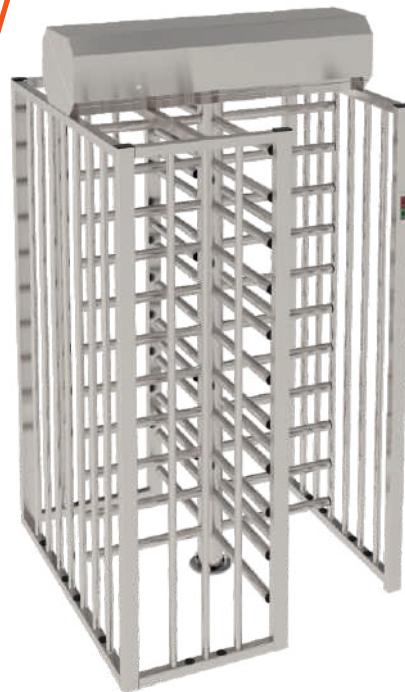

20

pers/min

CROSSING CAPACITY



535

mm

PASSAGE WIDTH



41/65**

PROTECTIVE LEVEL



MOTORIZED



BI-DIRECTIONAL

ADVANTAGES

- Motorized
- Bi-directional
- Variety of metal and metal treatment types
- Three arms (angle between bars 120°) and four arms (angle between bars 90°) modifications
- Integration with any type of access control and ID systems
- Low power consumption
- Whisper quiet, low noise operation
- Possibility of customization
- Wide range of accessories
- Complete supply set as a standard
- Fail-safe (automatic opening in both directions when power goes off)

OPTIONS

- Integration with passes counter/ RFID device/ coin acceptor push button/fingerprint/ barcode/QR-code reader etc.)
- Servo-drive mechanism
- Remote radio controller
- Heating function for external installation (for cold climates)
- Backup battery 12V, 17 A·h
- Protective canopy or roof

STANDARD

- 2 types of LED indication
- Wired remote control
- Fail-safe

* first figure is for indoor installation, second figure is for outdoor installation.
Protection level could be up to IP65 upon request.

TECHNICAL SPECIFICATIONS	
Unit width, mm	1254
Unit length, mm	1300
Unit height, mm	2300
Weight, kg (not more)	375
Standard mechanism	Servo-drive

CONTROLLED BY:



access control system;



manual control

When power goes OFF
both directions are open.

ELECTRICAL SPECIFICATIONS	
- Voltage: - from the AC 230V, 50/60Hz; - from a DC source 12 V; - Maximum power consumption 55W per pass	

AMBIENT TEMPERATURE RANGE	
- Standard	+1°C to +40°C, up to IP41
- Optional	-20°C to +55°C, up to IP65

MATERIALS	
Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL

INSTALLATION AREAS
- Governmental Institutions - Military Bases - Nuclear Power Plants - Production sites (Industrial Plants) - Commercial areas - Financial institutions - Airport Premises - Business (Office) Centers - Hotels - Sport Complexes - Recreation areas - Urban areas - Education Institutions - others

