
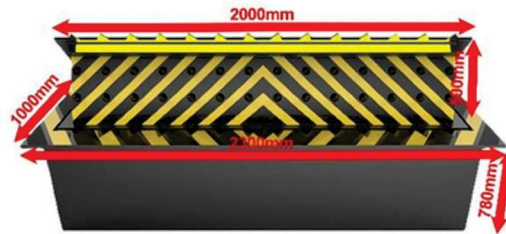


Model: CP-L32 -2000 mm

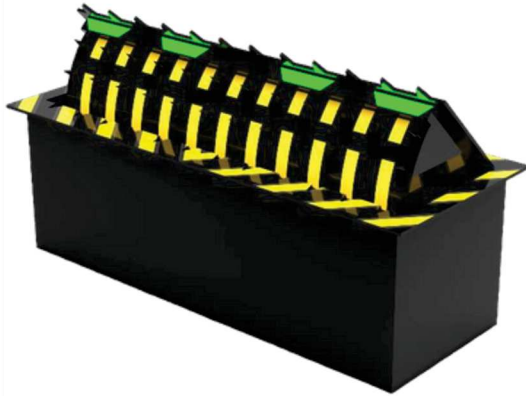

Mechanism	Hydraulic
Rising time	3.0~5.0 s
Lowering time	1.0~3.0 s
Voltage	380 Vac $\pm$ 10%, 50-60 Hz
Obstacle length	2000mm
Obstacle height	500mm
Dimensions(underground)	2300(length)*1000(width)*780(depth)mm
Thickness, top cover	16 mm
Axle load	80 tons
Distance available, remote control	$\leq$ 30 meters
Distance available, console	$\leq$ 100 meters
Operating temperature	-20 °C ~ 60 °C
Protection grade	IP 68
Max daily cycles	2000 cycles
MCBF(mean cycles between failures)	>3 million cycles
Emergency mode	Sinking mechanical device with manual release
Impact energy	Not tested
Certificate	Not tested
Material	A3 steel
Warning	LED and reflective film