
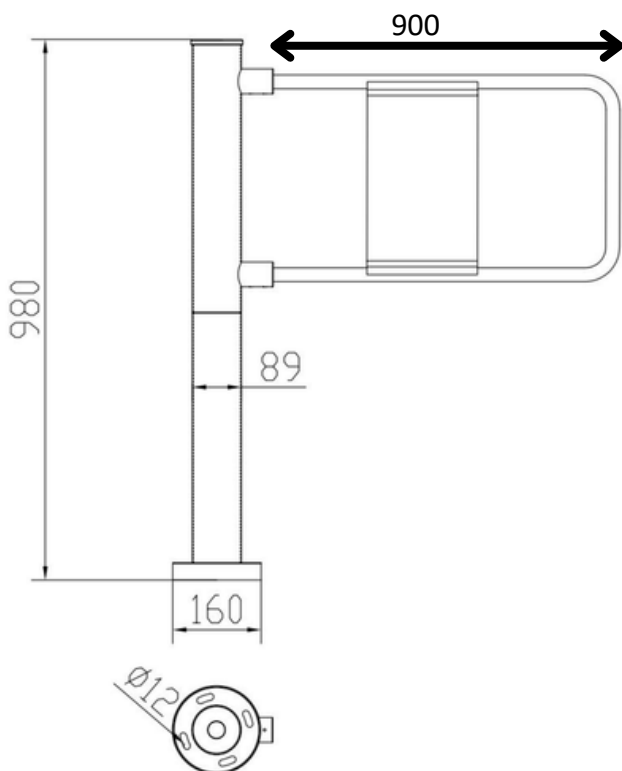



# MANUAL SWING GATE CP-M8

The CP-M8 manual swing gate is a simple and low-cost swing gate, mainly used to control two-way traffic (single way is available). It has a built-in high-performance spring to control the running direction. The manual push arm opens below 80 degrees and the floor spring automatically closes the gate. When the manual push arm is opened over 80 degrees, the swing arm will lock and you need to manually push the arm to close the gate.

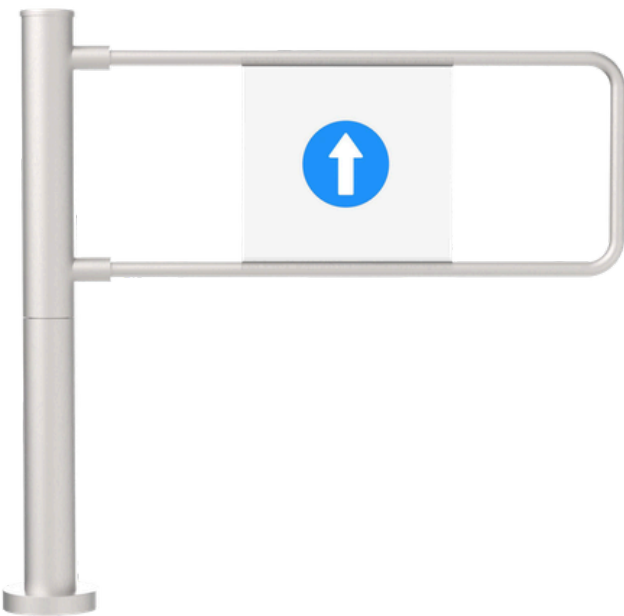

## Technical Specifications

Gate Size	φ89*980mm (can be customized)
Gate Material	304 Stainless steel
Swing arm Material	304 Stainless steel and Acrylic ,
Pass Width (a piece)	Max 900mm
Pass Width (a pair)	1800mm
Passage direction	Bi-directional
Pass rate	40 persons/minute
Operating control	High tension spring
Power input	None
Working environment	Indoor or outdoor
Working temperature	-40°C~+70°C

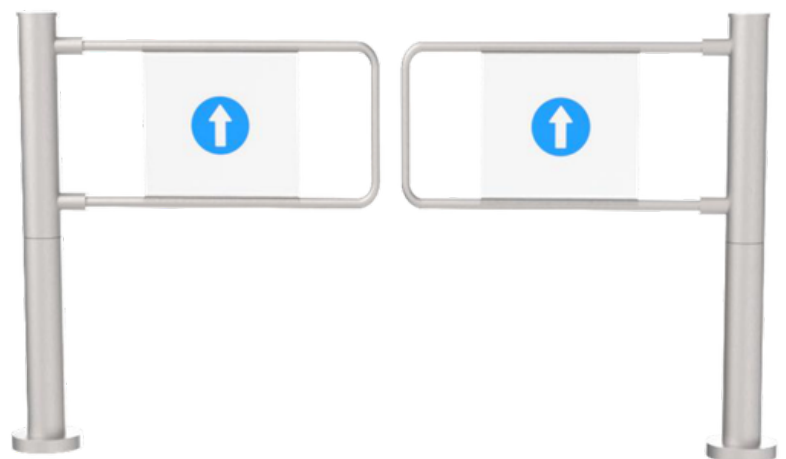



Contact with us

Adres:

Olszowa 5, 05-300 Wólka Mińska

Web site:

<https://www.bramkiobrotowe.eu/>

Phone:

+48 795 183 316